
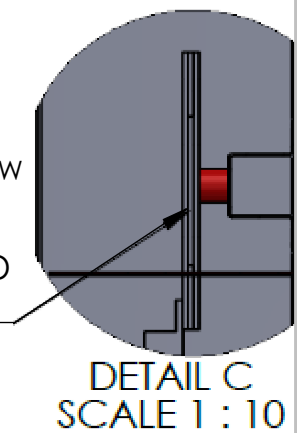


PHASE SIDE VIEW NOTES:

1. NEMA 3R CONSTRUCTION INCLUDES SHED ROOF , EXTERNAL MOUNTING TABS ON ALL FOUR CORNERS,GASKETED COVERS AND DOORS ALONG WITH SHED ROOF AND SKIRTED, GASKETED MIDDLE DOORS
2. BUS BARS - COPPER 98% CONDUCTIVITY
3. ENCLOSURE WILL DISPLAY MANUFACTURERS NAME
4. ALL NUTS, BOLTS AND WASHERS MUST BE 1/2-13 ZINC COATED GRADE 5 STEEL
5. MAX WIRE SIZE LINE AND LOAD SIDE: (4) 600 MCM OR (8) 250 MCM LEADS (MINIMUM WIRE SIZE:#4)
6. FRONT DOOR IS OUTFITTED WITH SEALABLE SCREWS & PADLOCKABLE PROVISIONS
7. DESIGNED FOR EITHER LINE TOP/LOAD BOTTOM CABLE ENTRY OR LOAD TOP/LINE BOTTOM CABLE ENTRY

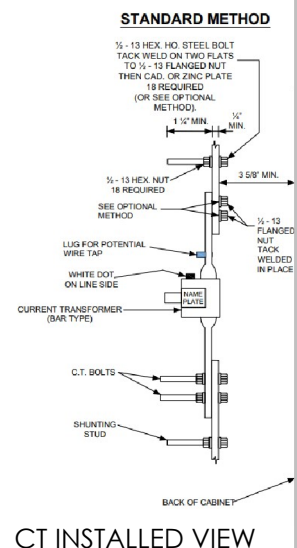

	NAME	DATE
DRAWN BY	N. BOSETTI	5/2/2024
APPROVED BY		
PROPRIETARY AND CONFIDENTIAL		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Nav-Tech Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Nav-Tech Inc. IS PROHIBITED.		

NAV-TECH INCORPORATED

155 MARCUS BLVD
HAUPPAUGE, NEW YORK 11788
PH: (718) 257-2111 FAX: (718) 257-2626

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE NOMINAL UNLESS EXPLICITLY STATED OTHERWISE

MAT'L:	12 GA GALV
FINISH:	POWDER COAT ANSI 61 GY
WEIGHT:	N/A
UNLESS OTHERWISE SPECIFIED:	
1. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES .015 X 45° OR .015R	
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
3. $\frac{125}{\checkmark}$ MACHINED SURFACES EXCEPT AS NOTED	

DRAWING TITLE:	298CT N3R SPEC SHEET			
PART #:	NAV-298CT-1600-N3R			
DESCRIPTION:	NEMA 3R 298 CT CABINET 1600 AMP SPECIFIED TO CON ED MES 298			
DO NOT SCALE DRAWING	SCALE	SIZE	SHEET	REV.
	1:10	A	1 OF 1	3