


# NOTES:

1. BOX AND COVER CONSTRUCTION- GALV SHEET STEEL(12GA)
2. SEAM WELDED CONSTRUCTION WITH OUTSIDE MOUNTING TABS
3. FINISH: POWDERCOAT GRAY ENAMEL
4. BUS BARS- COPPER 98% CONDUCTIVITY
5. BOX SHALL HAVE NAME PLATE WITH MANUFACTURER'S NAME,
6. FRONT COVERS SHALL BE SEALABLE & LOCKABLE
7. LINE SIDE: PROVISION FOR UP TO (6) 600MCM/ø&±
8. LOADSIDE: MOUNT UP TO (6) 600MCM/ø&±
9. UP TO 1000A: 1 LEAF OF BUS
10. UP TO 2000A: 2 LEAVES OF BUS
11. PADMOUNT IS STANDARD, EXTERNAL WALL MOUNT TABS AVAILABLE UPON REQUEST

## SECTION B-B








7.00 11.00 11.00 6.00

PHASES HAVE 1/4"-20 TAPPED HOLE IN CT COMPARTMENT FOR NEUTRAL LUG

GLASTIC CT COMPARTMENT ISOLATION BARRIER

NON CONDUCTIVE CT SUPPORTING SHELF 1/4" THICK ANGLE CHANNEL

NEMA 3R SHED ROOF AND SKIRTED FRENCH DOORS. COVERS FULLY GASKETED AND STITCH WELDED CONSTRUCTION

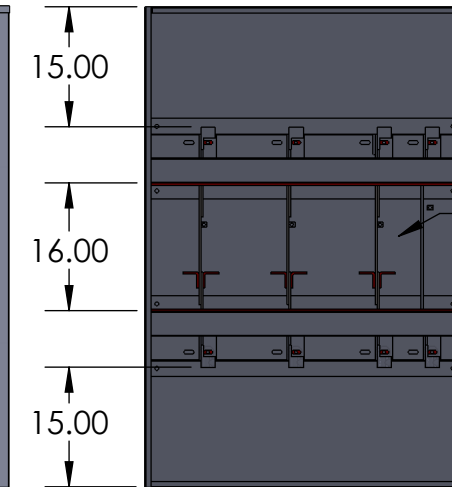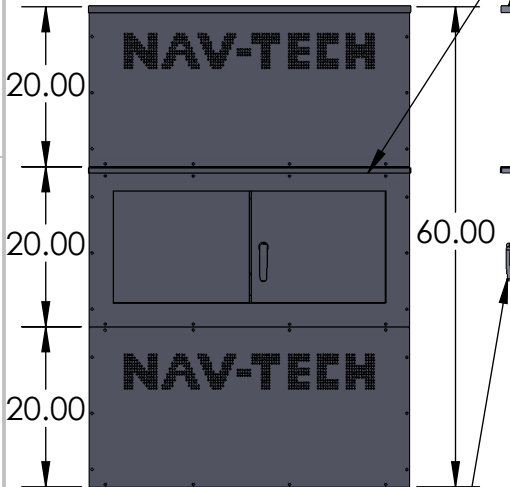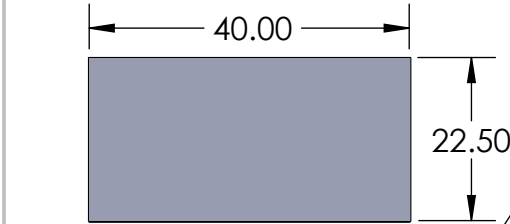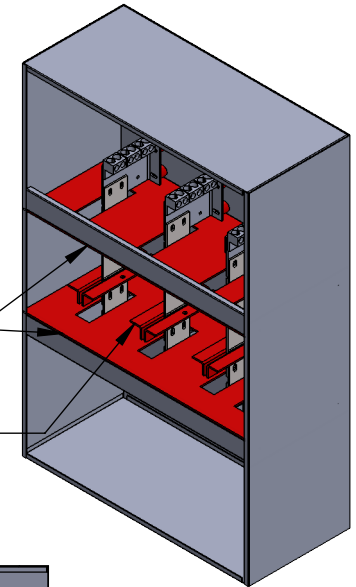

11.00 MIN 7.00 MIN