



NOTES:

- 1. BOX AND COVER CONSTRUCTION - GALV SHEET STEEL (12GA).
- 2. FINISH: POWDERCOAT GRAY ENAMEL.
- 3. BUS BARS- COPPER 98% CONDUCTIVITY.
- 4. TERMINALS INCLUDED - SEE CHART FOR # OF SETS.
- 5. TOP HINGED COVER WRAPS AROUND EDGES ON 3 SIDES, HINGE ON RIGHT SIDE IS STANDARD, BOTTOM COVER IS A FLAT SCREW COVER.
- 6. NO VENTING UNLESS SPECIFICALLY REQUESTED.
- 7. LOCKABLE IN "OFF" POSITION STANDARD - LOCKABLE IN "ON" AVAILABLE BY REQUEST.
- 8. ISOLATED NEUTRAL BUS WITH REMOVABLE LINK IN CENTER AVAILABLE BY REQUEST.
- 9. PADMOUNT AVAILABLE BY REQUEST.

TOP VIEW



B

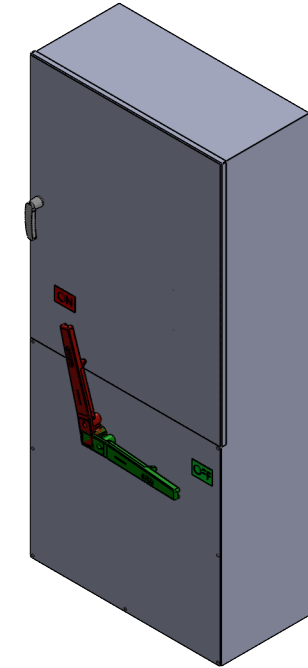

B



FRONT COVERED VIEW

FRONT OPENED VIEW

SIDE VIEW

A

A

PART #	AMPS	MAX VOLTS	FEED	SWITCH	LUGS
400BPS-T	400A	600V	TOP	J365WOL	1 SET 600MCM
400BPS-B	400A	600V	BOTTOM	JB365WOL	1 SET 600MCM
600BPS-T	600A	600V	TOP	J366WOL	2 SETS 600MCM
600BPS-B	600A	600V	BOTTOM	JB366WOL	2 SETS 600MCM
800BPS-T	800A	600V	TOP	L367-A	2 SETS 600MCM
800BPS-B	800A	600V	BOTTOM	LB367-A	2 SETS 600MCM

DRAWN BY	NAME	DATE
REVIEWED BY	N. BOSETTI	12/31/2024

NAV-TECH
INCORPORATED

155 MARCUS BLVD
HAUPPAUGE, NEW YORK 11788
PH: (718) 257-2111 FAX: (718) 257-2626

MAT'L:	12 GAUGE GALV STEEL
FINISH:	GRAY POWDER COAT ANSI 61
WEIGHT:	
ALL DIMENSIONS ARE NOMINAL UNLESS EXPLICITLY STATED OTHERWISE	

DRAWING TITLE:	400A-800A ENCLOSED BPS
PART #:	XXXBPS-X
DO NOT SCALE DRAWING	

DESCRIPTION:				
NEMA 1 ENCLOSED BOLTED PRESSURE SWITCH 3P/3W RATINGS: 400A-800A 200K AIC MAX				
SCALE:	1:20	SIZE	A	SHEET
				1 OF 1
				REV. 0