
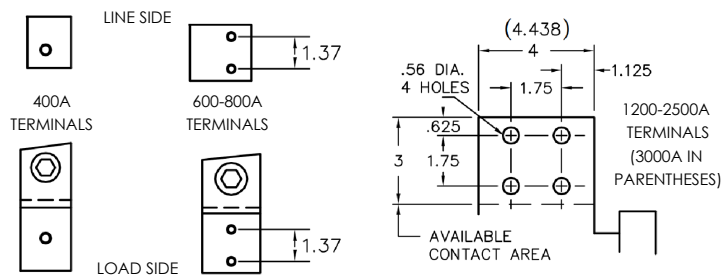


B

B

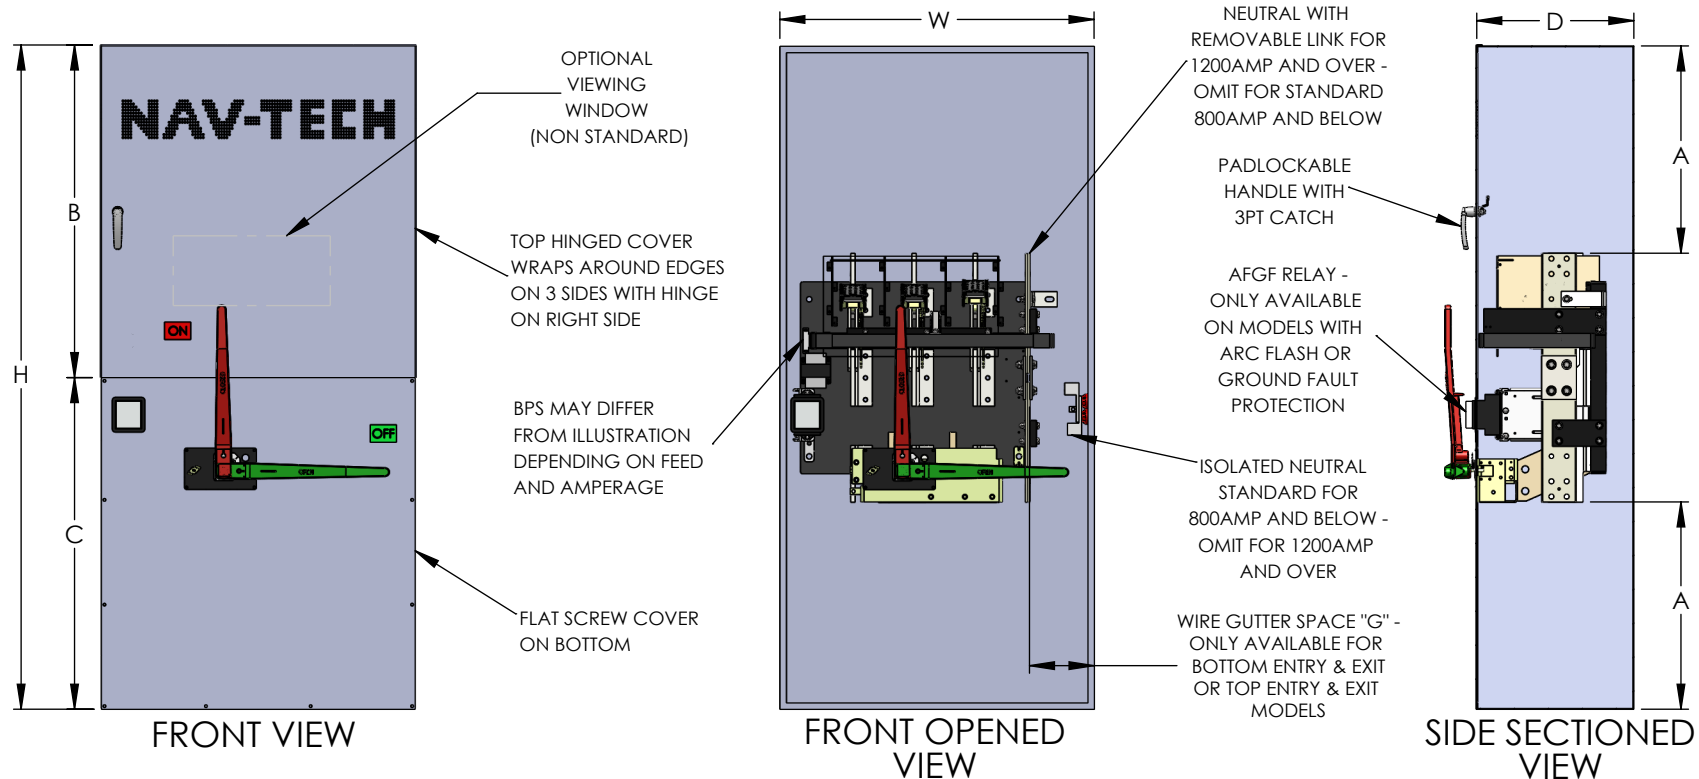

AMPERAGE	WIRE SETS 600MCM	FUSE TYPE	H HEIGHT	W** WIDTH	D DEPTH	G GUTTER	A	B	C
400	1	J	58	22 (28)	11.5	6 MIN	16 MIN	32	26
600	2	J	58	22 (28)	11.5	6 MIN	16 MIN	32	26
800	2	L	58	22 (28)	11.5	6 MIN	16 MIN	32	26
1200	3*	L	76	36 (48)	18	12 MIN	18 MIN	38	38
1600	4*	L	76	36 (48)	18	12 MIN	18 MIN	38	38
2000	5*	L	76	36 (48)	18	12 MIN	18 MIN	38	38
2500	6*	L	76	36 (48)	18	12 MIN	18 MIN	38	38
3000	8*	L	76	36 (48)	18	12 MIN	18 MIN	38	38
4000	10	L	76	42 (54)	20	12 MIN	20 MIN	38	38

*FOR 1200-3000A MODELS, BUS EXTENSIONS ARE AVAILABLE FOR EASE OF LUG ACCESS OR EXTRA SETS. LUGS MAY BE DIFFICULT TO INSTALL FOR OVER 8 SETS.

**IN PARENTHESES IS THE WIDTH WITH WIRE GUTTER SPACE FOR BOTTOM ENTRY & EXIT OR TOP ENTRY & EXIT MODELS ONLY.

DRAWN BY N. BOSETTI		NAME N. BOSETTI	DATE 7/17/2026	NAV-TECH INCORPORATED	MAT'L: 12 GAUGE GALV STEEL	DRAWING TITLE: INDOOR ENCLOSED BPS	DESCRIPTION: NEMA 1 ENCLOSED FUSED BOLTED PRESSURE SWITCH 3P/4W RATINGS: 400A-4000A 200K AIC MAX	
REVIEWED BY			FINISH: GRAY POWDER COAT ANSI 61		PART #: NAV-BPS-1			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAV-TECH INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NAV-TECH INC. IS PROHIBITED.		155 MARCUS BLVD HAUPPAUGE, NEW YORK 11788 PH: (718) 257-2111 FAX: (718) 257-2626	WEIGHT:		DO NOT SCALE DRAWING			SCALE: 1:20

A

2

1